

# Manual Sensor Actuator Search - 3.3x Applicable firmware version


Step 1:


Open the "Configuration" tab and click "Sensor Actuator Search".




Step 2:

For a new search click on "Check All".

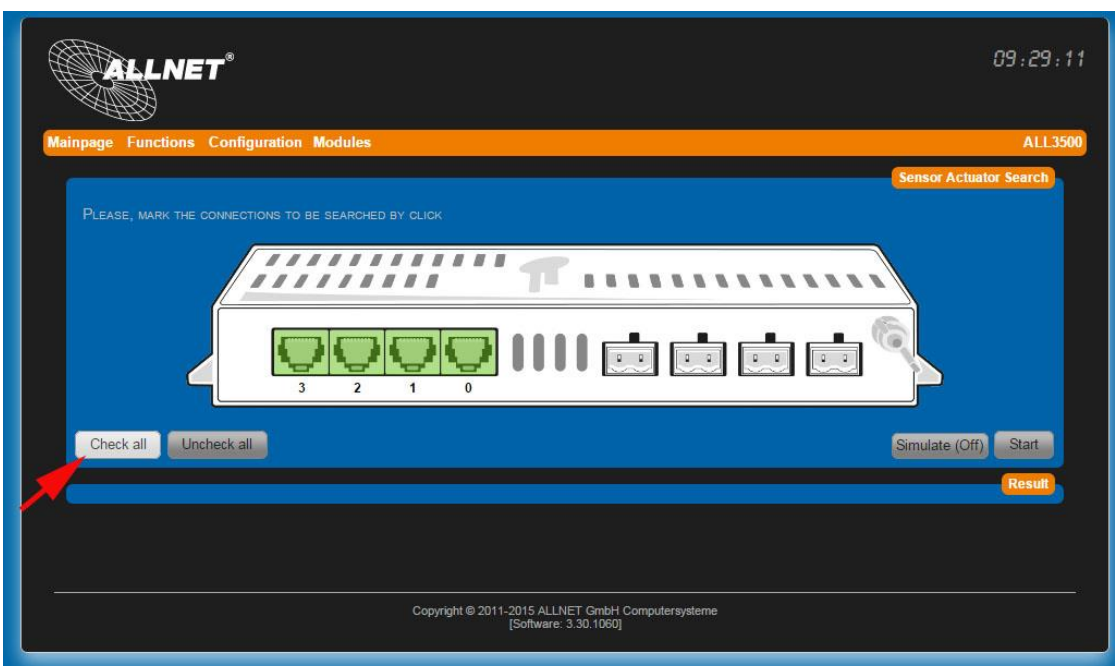

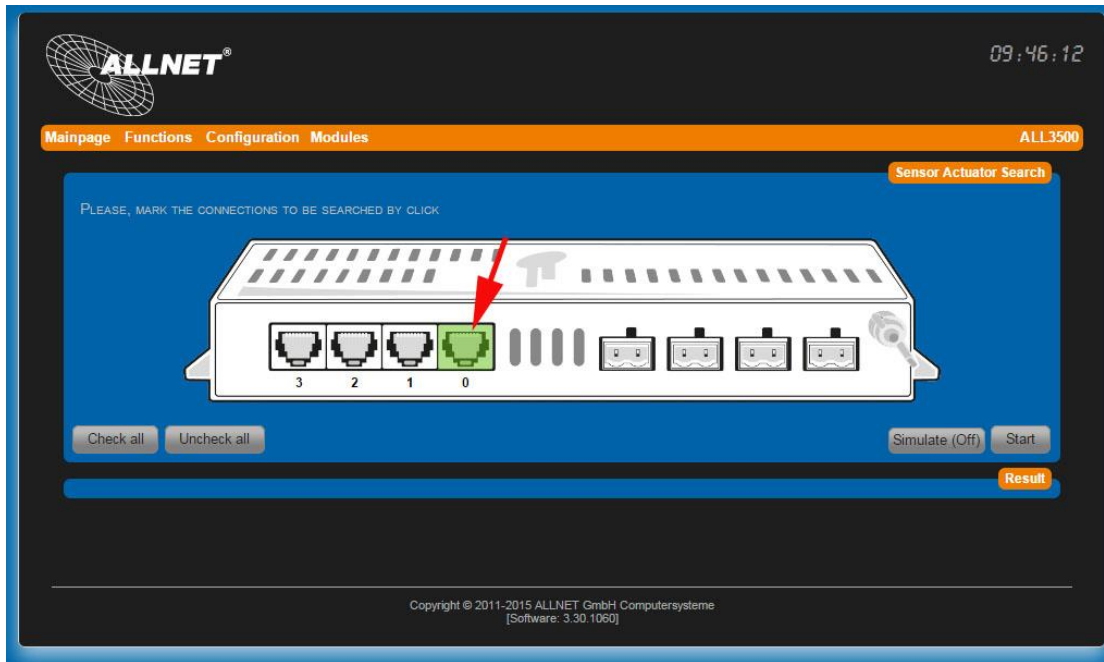


Click "Simulate (On)", the sensor is not automatically applied to the Mainpage. In our case, we leave this feature off.

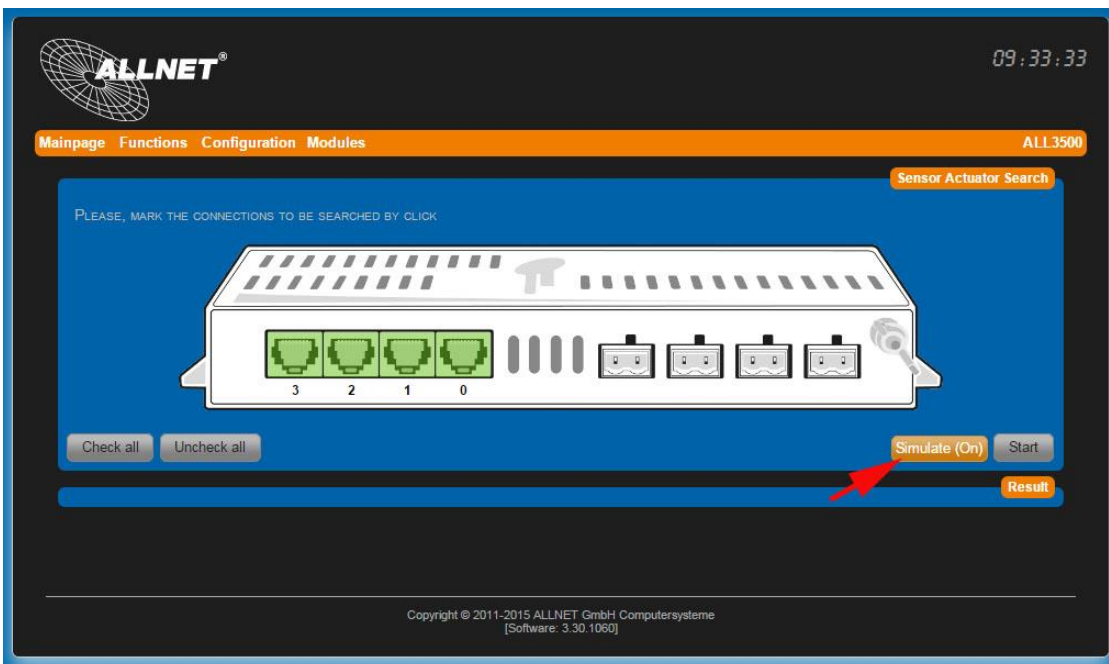


Step 3:

Now click on "Start". The search is animated and the sensors found are displayed below.

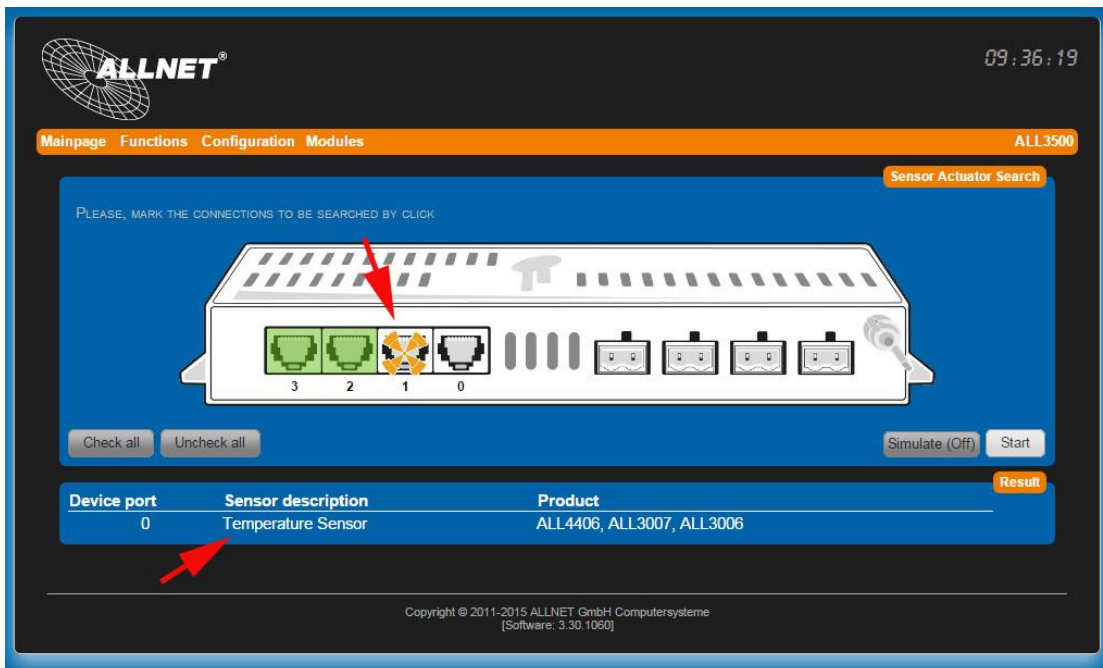

Step 4:


If the search is successfully completed, click on the tab "Mainpage" on "Overview".

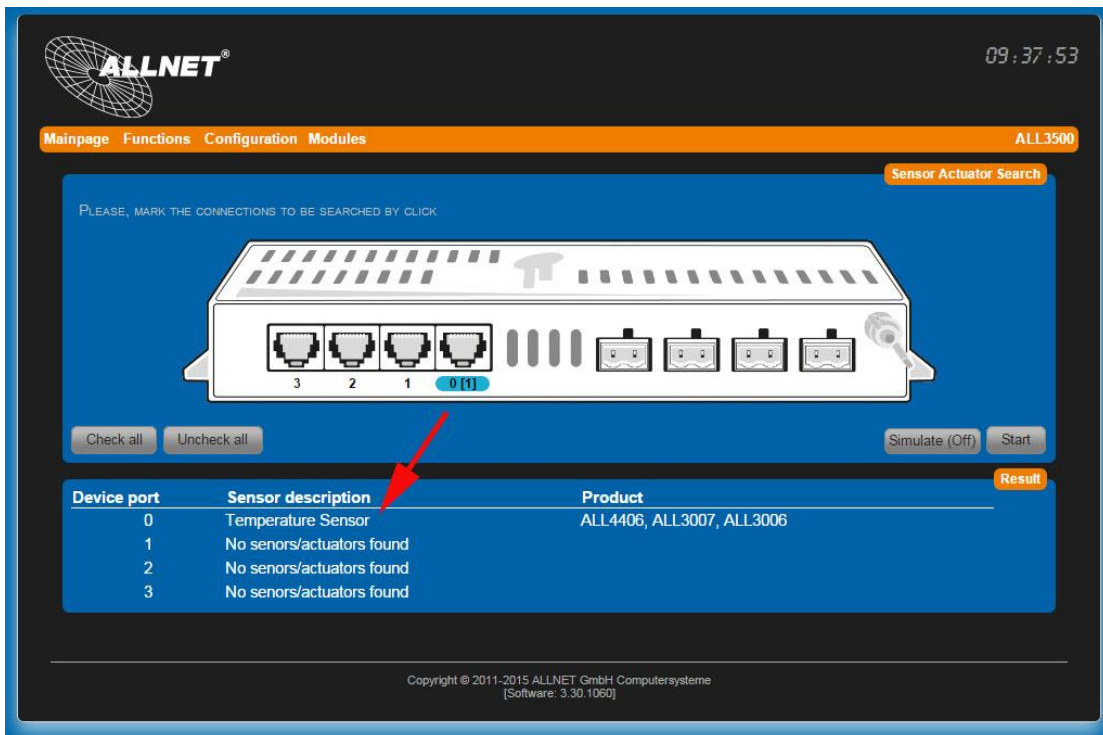

The sensor will be displayed on the home page and can be further configured.




The same procedure you have to use when using a multiplexing "or ALL4404 ALL4504". Again, repeat step 1 and click on "Select All".

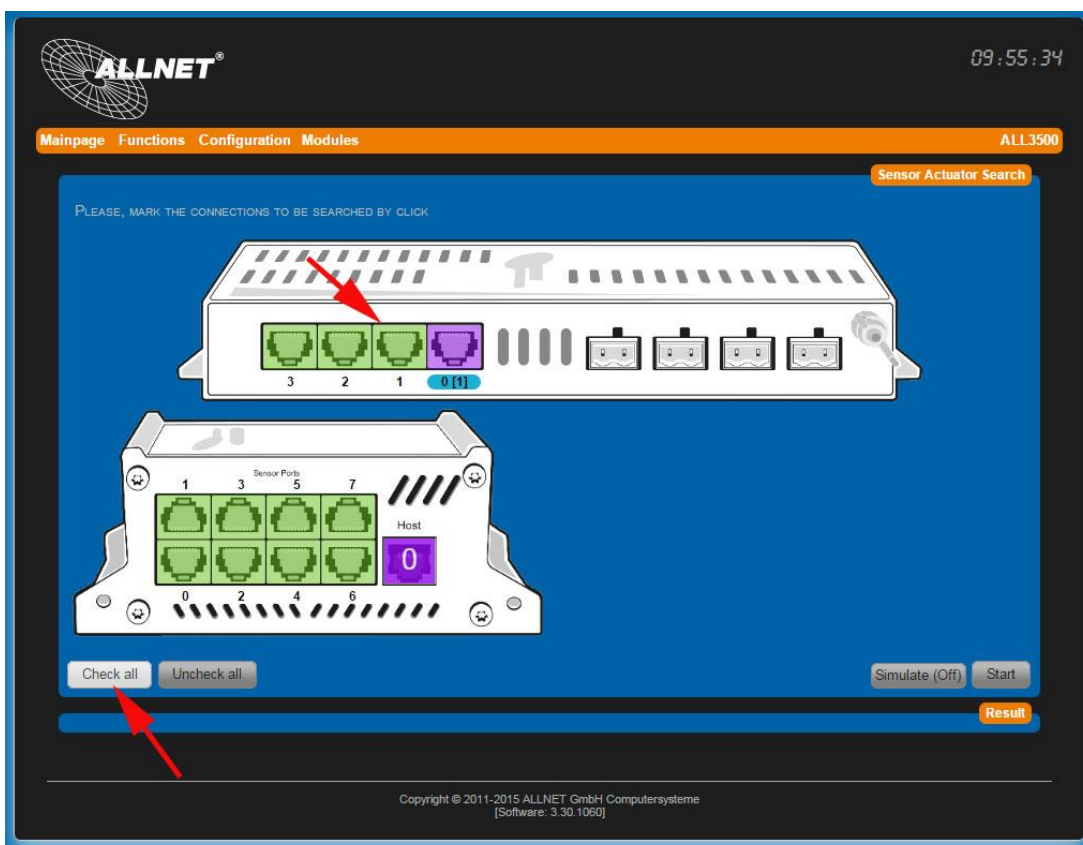


## Step2:

We click again on "Start" and the search will begin at all green ports.

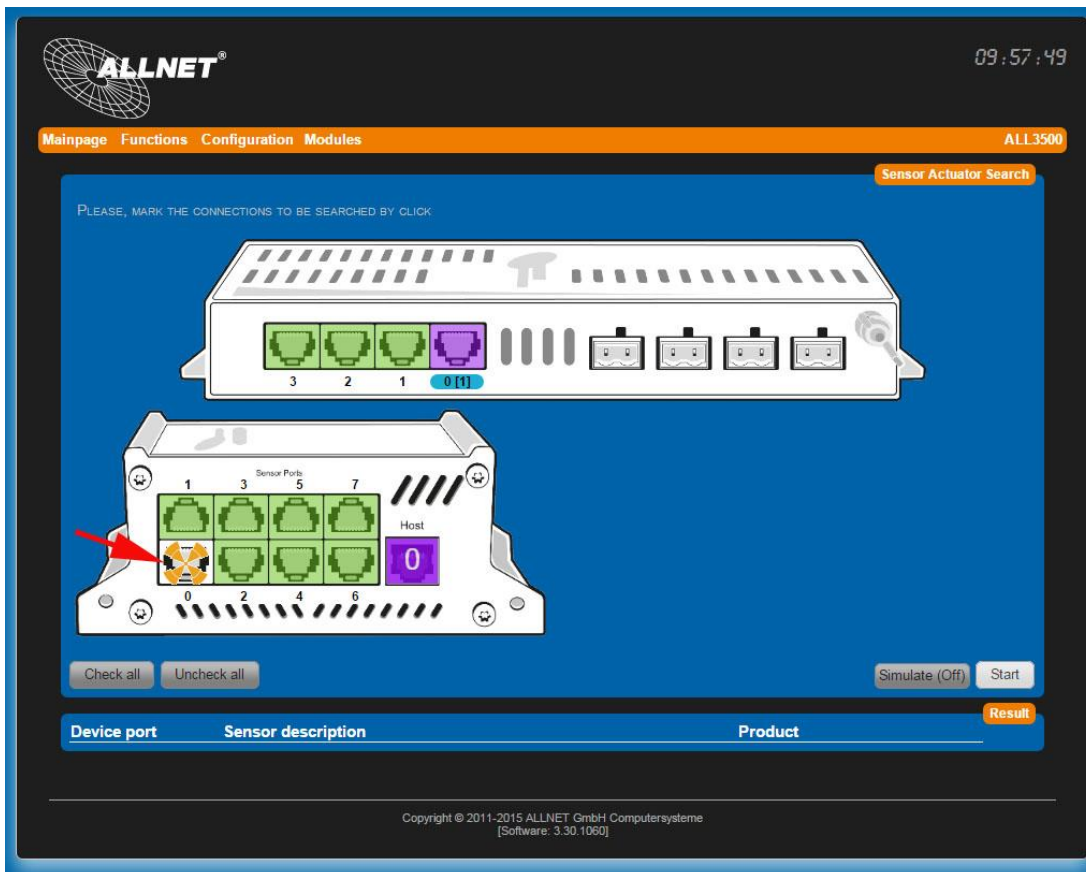

## Schritt 3:

In our case, depends on a stroke motion "ALL4452". This is a single switching input. Please click on "Select" button. The sensor array is marked "green". Then we click on "Create selection".

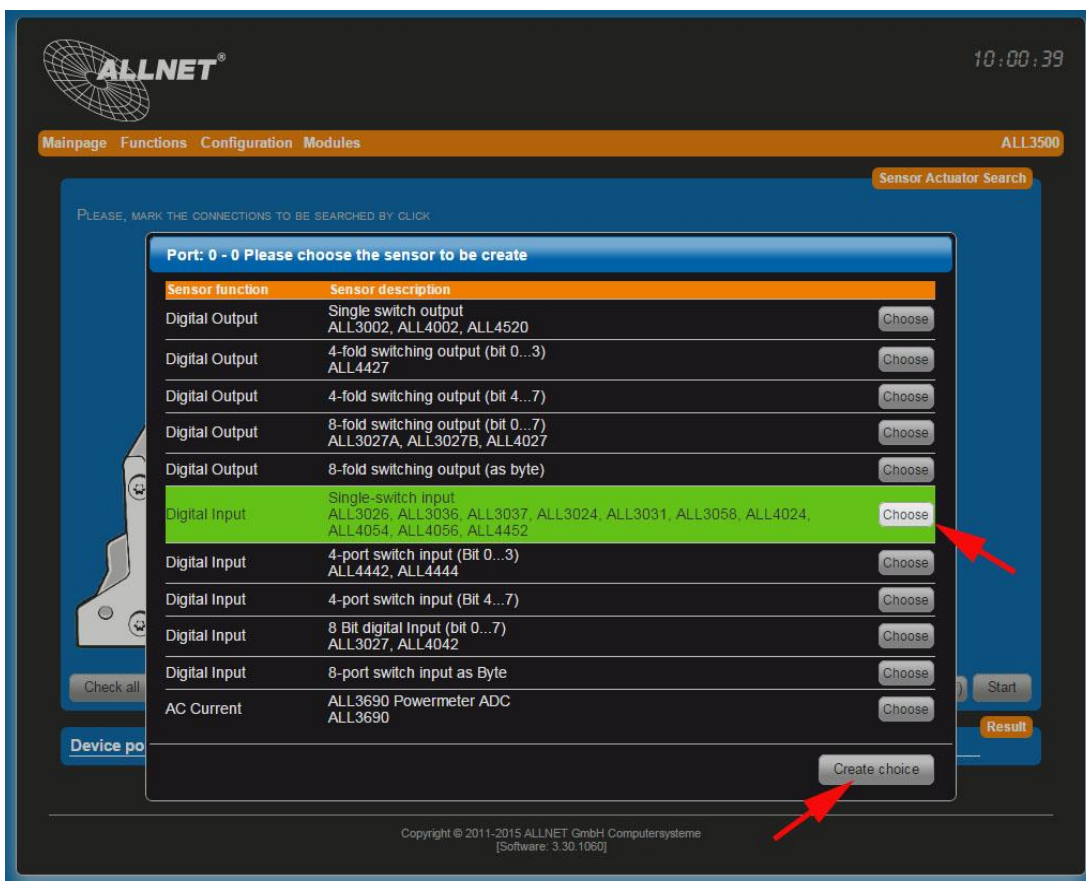



The search is finished and the sensors found are again below.

PLEASE, MARK THE CONNECTIONS TO BE SEARCHED BY CLICK

Check all Uncheck all Simulate (Off) Start

Device port	Sensor description	Product
0 - 0	Single-switch input	ALL3026, ALL3036, ALL3037, ALL3024, ALL3031, ALL3058, ALL4024, ALL4054, ALL4056, ALL4452
0 - 1	No sensors/actuators found	
0 - 2	No sensors/actuators found	
0 - 3	No sensors/actuators found	
0 - 4	No sensors/actuators found	
0 - 5	No sensors/actuators found	
0 - 6	No sensors/actuators found	
0 - 7	No sensors/actuators found	
1	No sensors/actuators found	
2	No sensors/actuators found	

We click under the tab page on "Overview" and see the applied sensor. "0" indicates no motion and therefore no action. "1" means the sensor detects motion and could turn an actuator.

ALLNET® 10:08:21

Mainpage Functions Configuration Modules ALL3500

Schalteingang 3 0

Schalteingang 2 0

Gerhard Arbeit... Schaltausgang ...

Schaltausgang ... Schaltausgang ...

Schalteingang 4 0

Intern 37.25 °C

Schalteingang 1 0

Germering 20° 05:38 21:02  
Air Pressure 1017 hPa  
Humidity 88 %  
light intensity shower rain  
Morning 19° Noon 19° Evening 20° Night 15°  
24.07. 25.07. 26.07. 27.07. 28.07. 29.07.  
28° 23° 19° 18° 20° 24°  
18° 12° 13° 13° 14° 14°  
OpenWeatherMap

Schaltausgang ...

Port 0 26.68 °C

Port 1-0 0

Copyright © 2011-2015 ALLNET GmbH Computersysteme  
Software: 1.01.0001